

**Mi·Light<sup>®</sup>**  
**User Instruction**

**IP Rate: IP65**  
**RGB+CCT Smart LED Garden Light**  
Model No.: FUTC01 / C02

# Features



RGB+CCT  
16 Millions of colors to choose



Color temperature  
2700~6500K



Dimmable  
Saturation control



2.4G RF wireless transmission  
technology



Remote control  
Control distance 30m



Smart phone App control  
Mi-Light WiFi ibox is needed



Waterproof and dustproof  
grade IP65




Beam Angle 15°  
Illumination distance Greater than 10m



Made in China


# Parameters

Model No.	FUTC01	FUTC02
Input Voltage	DC 24V	AC86~265V / 50~60Hz
Power	9W	9W
Color temperature	2700K~6500K	2700K~6500K
Luminous Flux	700LM	700LM
Light Efficiency	80LM/W	80LM/W
CRI	>80	>80
PF	—	>0.5
Lifespan	50000 hours	50000 hours
Beam Angle	15°	15°
Illumination distance	>10m	>10m
IP Rate	IP65	IP65
Material	Aluminum	Aluminum

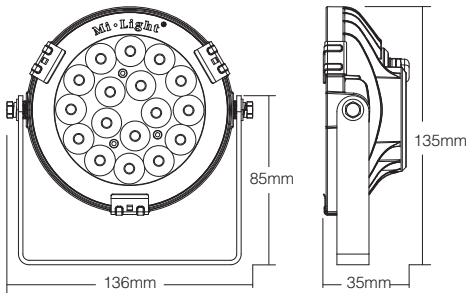

## Auto-transmitting Diagram


One Garden Light can transmit the signals from the remote control to another Garden Light within 30m, as long as there is a Garden Light within 30m, the remote control distance can be limitless.

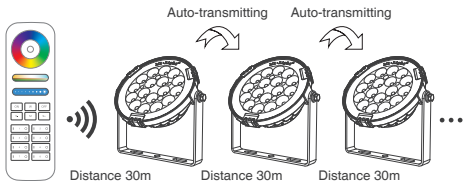


## Auto-synchronization function

Different Garden Light can work synchronously when they are started at different times, controlled by the same remote, under same dynamic mode and with same speed.


### Remark:

1.  Indicating Auto-transmitting.
2. Controller will be auto-synchronizing in the same dynamic modes and within 30m controlling distance.

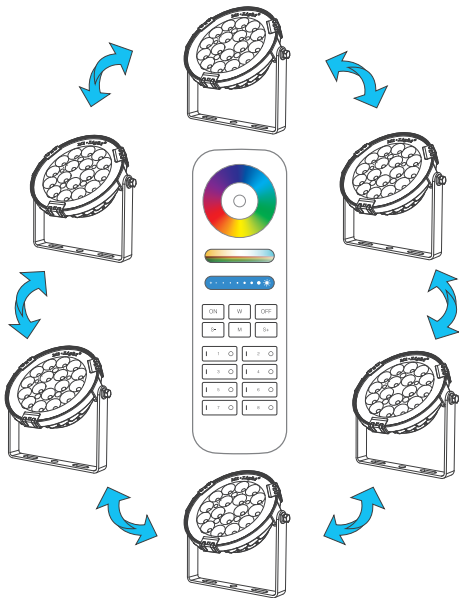

## FUTC01 Connection diagram


Input Voltage DC 24V, don't need to distinguish polarity on the connection

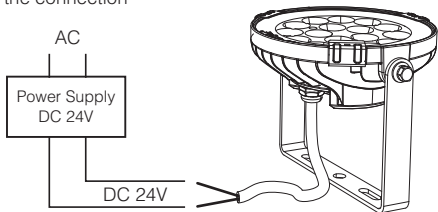

## FUTC02 Connection diagram

AC86V~265V

(L) (N) ( $\equiv$ )  
Brown Blue Yellow-green

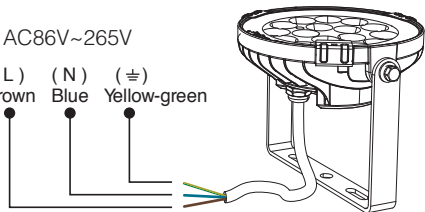


# Link / Unlink


Compatible with FUT089 / FUT092 remote controls  
(Purchased separately)

**Link:** Switch off the power, then switch on again after 5 seconds, press " | " 3 times within 3 seconds; the light will blink 3 times slowly when it is done.

**Unlink:** Switch off the power, then switch on again after 5 seconds, press corresponding " | " or master ON button 5 times within 3 seconds; the light will blink 10 times quickly when it is done.

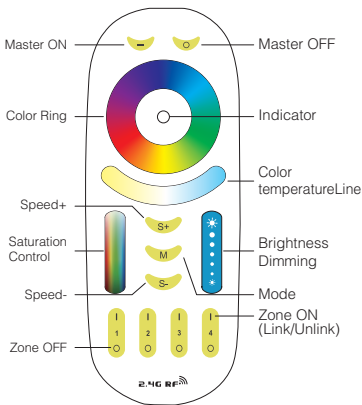

FUT092

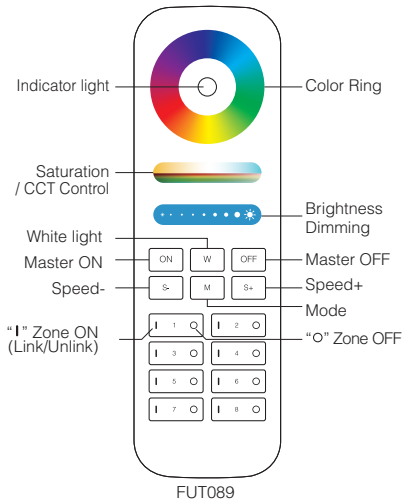

## Caution

- ⦿ Amateur do not dismantle and install the light
- ⦿ Users must be correct, strict and solid to install the light; do not use the light on strenuous vibration area.
- ⦿ The lighting will be heating on working, pls do not cover the lighting housing.